

300 PSI INLINE FILTERS

We have the highest quality materials, competitive pricing, and a huge inventory with overnight shipping available. There are more models available than listed here, call for a Motorsport catalog.

Model ILA




HOW TO ORDER

Select the desired specifications from the ordering table and build an ordering code number, as shown in this sample:

MODEL CODE
4ILA - 03 - 74 - F3 - RD
 MODEL - SIZE - MICRON - SEALS - COLOR

REPLACEMENT SCREENS
8286-02
 PART NO.

MODEL NUMBER	CONNECTION SIZE	MICRON SIZE	SEALS	COLOR
ILA	02 (1/4-in.NPT) 6T (3/8-in.TUBE)	238	No Symbol Buna N	RD Red
		149		
		74	F3 Viton	BK Black
		40		
		25		
10				
4ILA	02 (1/4-in.NPT)	595	F3 Viton	BL Blue
		238		
	03 (3/8-in.NPT)	149		
	04 (1/2-in.NPT)	74		
	63			
	40			
14ILA	04 (1/2-in.NPT)	595	F3 Viton	BL Blue
		238		
	06 (3/4-in.NPT)	149		
	08 (1-in.NPT)	74		
	63			
	40			
	25			
10				
		10C		
		5C		
		08G		
		03G		

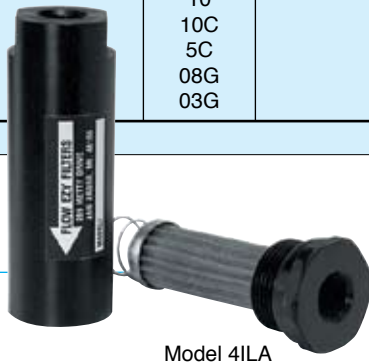

Model 4ILA



Model 14ILA

Pressure Rating: 300 PSI
 Housing Material: Anodized Aluminum
 Colors Available: Black, Blue, Red

Pleated Screen: Stainless Steel
 Flow Rate: Up to 2 GPM
 Filtration Area: 1 Square Inch
 Weight: 3 Ounces
 Dimensions: 1/4 NPT: 1.75 x 1-in.
 3/8-in. Tube Size 6: 2.88 x 1-in.

Pleated Screen: Stainless Steel
 Flow Rate: Up to 4 GPM
 Filtration Area: 20 Square Inches
 Weight: 6.6 Ounces
 Dimensions: 4-21/32 x 1-1/2-in.

Pleated Screen: Microglass, Cellulose, Stainless Steel (Stainless Steel Elements)
 Flow Rate: Up to 14 GPM
 Filtration Area: 60 Square Inches
 Weight: 1 Pound 2 Ounces
 Dimensions: 7-25/32 x 2-1/8-in.

MOUNTING CLAMPS

Clamps are "tailor made" for in-line filters. Made of stainless steel, with thermoplastic elastomer bushings tough enough to withstand temperatures up to 300°F.

ORDER BY PART NUMBER

MODEL NUMBER	PART NUMBER
4ILA	024M028-SS
14ILA	034M040-SS

Clamps
 Shown on
 Page 28